



VHF MARINE TRANSCEIVER

IC-M72



The radio with **MORE** :

- More Power (6 Watts)
- More Waterproof (IPX8)
- More Form Factor (easy to hold and operate)



Compact Body, Great "Form Factor"

A compact design, hourglass body-shape and comfortable side grips give the IC-M72 an outstanding "form factor"—it's easy to use with just one hand!

Highest available power! 6 Watts

The IC-M72's 6 Watts*¹ of transmit power can carry a conversation a long way. A large capacity 2000mAh Lithium-Ion battery allows for 15–16 hours of operation, under normal conditions*².

*¹ 5W for Australia version, *² 5% Transmit, 5% Receive, 90% Stand-by

Impressive Force5Audio

The M72's impressive audio output (600mW typ.*) is loud enough to hear in most any marine environment — even over loud engine noise. (* 10% distortion, 8Ω load)

Submersible PLUS (IPX8)

The IC-M72 offers Icom's best-ever protection against water intrusion. This radio has been tested to survive after being submersed in 1.5m (4.9ft) depth of water for 30 minutes.

Wide Viewing Angle LCD

A wide viewing angle, high intensity LCD is used in the IC-M72, offering bright, easy to read characters. The bright LCD backlighting and backlit keypad is great for night time operation.

30% Shorter Antenna

The IC-M72's antenna is engineered to perform with typical Icom efficiency even though it is nearly 30%* shorter than previous Icom marine antenna.

* IC-M72's antenna length is 115mm; 4¹⁷/₃₂ in.

Icom Inc.

Additional features

- Auto scan function to start scanning when receiving no signal
- Auto power save function
- Battery indicator shows remaining battery power in 4 levels
- Instant access to Ch. 16 and Ch. 9 (or call channel)
- Auto WX scan and WX Alert function
- Simple add/delete TAG scanning operation
- Built-in UT-112 compatible voice scrambler (Depending on version)
- AquaQuake draining function emits a vibrating sound and clears water away from the speaker grill

SPECIFICATIONS

GENERAL

- Frequency range :
 - Tx 156.025–157.425MHz
 - Rx 156.050–163.275MHz
- Usable channels : USA, INT, CAN*, WX channels (* Depending on version)
- Current drain (at 7.5V DC) :
 - Tx 6W output 1.7A typical
 - 5W output 1.5A typical
 - Rx Internal SP 400mA typical (AF Max.)
 - External SP 200mA typical (AF Max.)
- Operating Temp. range : -20°C to +60°C; -4°F to +140°F
- Antenna impedance : 50Ω (SMA)
- Dimensions (W×H×D) : 52.5×125×30 mm; (projections not included) 2 1/16×4 29/32×1 3/16 in
- Weight (approx.) : 280g; 9.9oz (with BP-245)

TRANSMITTER

- Output power (Hi/Mid/Low): 6/3/1W
Australia version 5/3/1W
- Max. frequency deviation: ± 5.0kHz
- Frequency error : ± 10ppm
- Spurious emissions : -68dBc typical
- Adjacent channel power : 70dB
- Hum and noise ratio : 40dB
- Audio harmonic distortion : Less than 10% (at 60% mod.)

RECEIVER

- Sensitivity (12dB SINAD) : 0.22μV typical
- Squelch sensitivity : 0.35μV typical (at threshold)
- Adjacent channel selectivity: 70dB typical
- Spurious response : 70dB typical
- Intermodulation rejection: 70dB typical
- Hum and noise ratio : 40dB
- Audio output power (at 10% distortion with an 8Ω load) :
 - Internal SP 0.6W typical
 - External SP 0.35W typical

Supplied accessories: (* Depending on version)

- Battery pack, BP-245
- Battery charger, BC-166
- AC adaptor, BC-147A/BM-95V*
- Belt clip, MB-103
- Antenna, FA-S64V
- Hand strap

Measurement made in accordance with TIA/EIA-603. All stated specifications are subject to change without notice or obligation.

OPTIONS


Some options may not be available in some countries. Please ask your dealer for details.




BP-245 BATTERY PACK
7.4V/2000mAh Li-Ion battery pack. Provides 15–16 hours* operating time (approx.). Same as supplied. *(Tx (Hi): Rx: standby=5:5:90).



BC-166 DESKTOP CHARGER + BC-147A/BM-95V AC ADAPTER
Regularly charges the battery pack, BP-245 in 11–12 hours (approx.). Same as supplied.



BC-119N DESKTOP CHARGER + AD-114 CHARGER ADAPTER + BC-145A/BM-95V AC ADAPTER
For rapid charging of a battery pack. Charging time: 3–4 hours. (approx.)

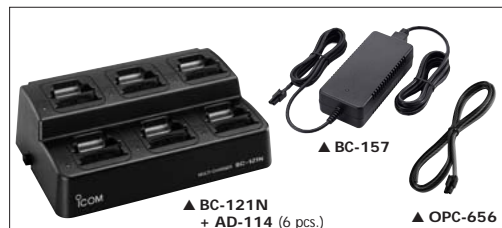

BC-121N MULTI-CHARGER + AD-114 CHARGER ADAPTER + BC-157 AC ADAPTER
For rapid charging of up to 6 battery packs (Six AD-114s are required). Charging time: 3–4 hours. (approx.)
OPC-656 DC POWER CABLE (12–16 V DC required)



HS-94 : Earhook headset with flexible boom microphone.
HS-95 : Behind-the-head headset with flexible boom microphone.
HS-97 : Throat microphone fits around your neck and picks up speech vibrations.
OPC-1392 : Required when using these headsets. These headsets are not waterproof.



HM-125 Full sized, submersible construction corresponds to IPX7 (1m depth for 30 minutes).



MB-86: Swivel-type.
MB-103: Alligator-type. Same as supplied.



CP-17L CIGARETTE LIGHTER CABLE WITH NOISE FILTER
OPC-515L DC POWER CABLE
Replaces AC adapter BC-145A when using DC power on battery charger, BC-119N. (12–16 V DC required)

Force5audio is a trademark of Icom Inc. (Japan) in the U.S.A.

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE, Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: +44 (0)1227 741741
Fax: +44 (0)1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

Icom Canada

Glenwood Centre #150-6165 Highway 17, Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom (Europe) Gmbh

Communication Equipment Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: +49 (0211) 346047
Fax: +49 (0211) 333639
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom France S.a

Zac de la Plaine, 1, Rue Brindejone des Moulains BP 5804, 31505 Toulouse Cedex, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding Road, Haidian District, Beijing, 100039, China
Phone: +86 (010) 5889 5391/5392/5393
Fax: +86 (010) 5889 5395
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.


A.B.N. 88 006 092 575
Unit 1 / 103 Garden Road, Clayton VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" 08190, Sant Cugat del Valles, Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom Polska

Sopot, 3 maja 54, Poland
Phone: +48 (58) 550 7135
Fax: +48 (58) 551 0484
E-mail: icompolaska@icompolaska.com.pl
URL: <http://www.icompolaska.com.pl>



JP98/14190QA TW03/00288EM
Icom Inc. (Japan), is an ISO 9001 and ISO 14001 certification acquired company.

American Communication Systems
Discover the Power of Communications™
TO ORDER - VISIT <http://www.ameradio.com>